

**RODENHOUSE**





**Fastening Systems**




## Plasti-Grip® PMF Plastic Masonry Fastener

Use for fastening EPS foam in PB EIFS systems, rigid foam insulation, and waterproofing drainage fabric into concrete or masonry block applications.

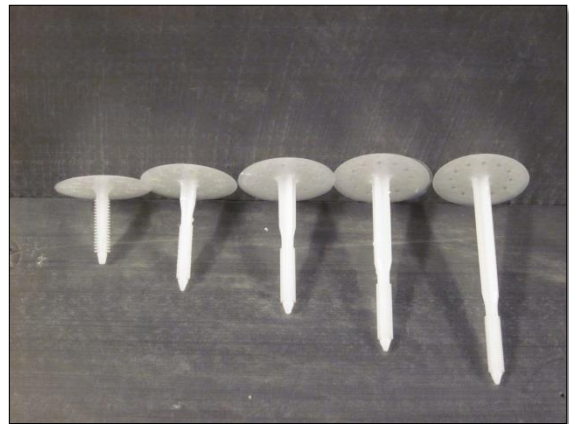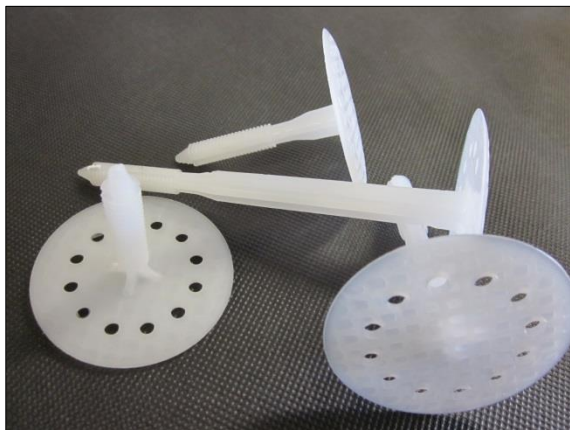

### **SPECS:**

- 2 3/8" diameter washer head
- Simple to install – drill and hammer
- Solid plastic design prevents thermal bridging
- No pins, screws, or adhesives required
- Pre-drill hole with 5/16" masonry bit
- Eliminates rusting screws



### Available Lengths:

- 2" PMF for insulation thickness of 1/2" – 3/4"
- 2 3/4" PMF for insulation thickness of 1" – 1 1/2"
- 3 1/2" PMF for insulation thickness of 1 1/2" – 2"
- 4 1/2" PMF for insulation thickness of 2 1/2" – 3"
- 5 3/8" PMF for insulation thickness of 3 1/2" – 4"



Rodenhouse Inc.  
974 Front NW #100  
Grand Rapids, MI 49504  
(T) 616-454-3100  
(F) 616-454-0404  
[www.rodenhouse-inc.com](http://www.rodenhouse-inc.com)

